






# Wash Down Little Champ® Hydraulic Power Units











### Whats The Purpose of a Wash Down Little Champ® Power Unit?

- \* Provide a Power Unit Base For Food Industry Or Other Similar Applications That Require Pressurized Wash Downs
- \* Other Possible Applications: Food Processing, Packaging, Clean Room, Sanitary, Petro-Chemical, Outdoor And Corrosive Environments.

#### Wash Down Little Champ<sup>®</sup> Features

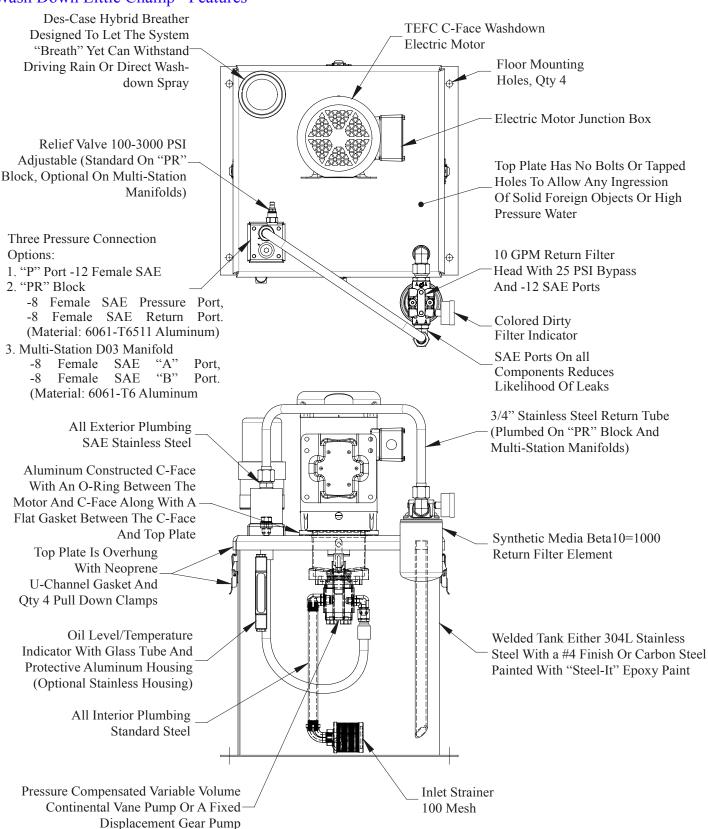

### Specifying Wash Down Little Champ® Power Unit

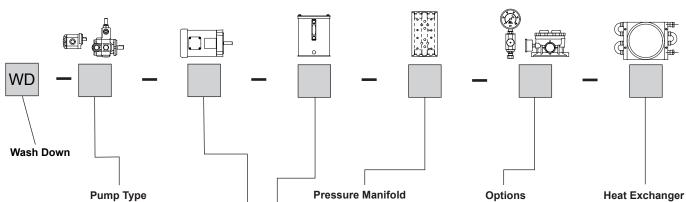

#### Pump Type

i dinp iypo				
Code	GPM (Ipm) @ 1725 RPM Max. Press.	Max. Pressure PSI (bar)		
G0.6B30	.545 (2.1)	3000 (207)		
G0.8B30	.769 (2.9)	3000 (207)		
G1.1B30	1.14 (4.3)	3000 (207)		
G1.6B30	1.59 (6.0)	3000 (207)		
G2.0B30	1.96 (7.4)	3000 (207)		
G2.3B30	2.28 (8.6)	3000 (207)		
G3.0B27	2.96 (11.2)	2700 (186)		
G3.4B26	3.44 (13.0)	2600 (179)		
G2.0B31.5	1.96 (7.4)	3150 (217)		
G2.9B31.5	2.87 (10.7)	3150 (217)		
G3.8B31.5	3.78 (14.3)	3150 (217)		
G5.0B30	5.01 (19.0)	3000 (207)		
G6.8B30	6.83 (25.8)	3000 (207)		
G8.7B30	8.65 (32.7)	3000 (207)		
G10.0B29	10.02 (37.9)	2900 (200)		
G11.8B27	11.84 (44.8)	2700 (186)		
V4B20	4.00 (15.1)	2000 (138)		
V6B20	6.00 (22.7)	2000 (138)		
V8B20	8.00 (30.3)	2000 (138)		
V10B10	10.00 (37.8)	1000 (69)		

Select gear pump from the Power Unit Accessories Catalog.

NOTE: Pump and motor ranges listed for each reservoir size are standard combinations. For special combinations, please discuss your application with your Continental Hydraulics distributor or the factory.

#### **Wash Down Motor**

Code	H.P.	Voltage*	Frame Size
005TWD	0.5	208/230/460/60/3	56C
007TWD	.75	208/230/460/60/3	56C
010TWD	1	208/230/460/60/3	56C
015TWD	1.5	208/230/460/60/3	56C
020TWD	2	208/230/460/60/3	56C
030TWD	3	208/230/460/60/3	182TC
050TWD	5	208/230/460/60/3	184TC
075TWD	7.5	208/230/460/60/3	213TC
100TWD	10	208/230/460/60/3	215TC
150TWD	15	230/460/60/3	254TC
200TWD	20	230/460/60/3	256TC

#### **Pressure Manifold**

Code	Description	
Р	Pressure Connection SAE -8 Female	
PR	With Built-In Relief SAE-8 "P" & "T" Female Ports	
V1R	Single Station Manifold D03 With Built-In Relief, SAE-8 "A" & "B" Female Ports	
V2R	Two Station Manifold D03 With Built-In Relief, SAE-8 "A" & "B" Female Ports	
V3R	Three Station Manifold D03 With Built-In Relief, SAE-8 "A" & "B" Female Ports	
V4R	Four Station Manifold D03 With Built-In Relief, SAE-8 "A" & "B" Female Ports	
V5R	Five Station Manifold D03 With Built-In Relief, SAE-8 "A" & "B" Female Ports	
V6R	Six Station Manifold D03 With Built-In Relief, SAE-8 "A" & "B" Female Ports	

\*IF YOU WOULD NOT LIKE A
RELIEF VALVE IN THE MANIFOLD
REMOVE THE "R" FROM THE CODE
(V4R MINUS "R" EQUALS V4)
Select Wash Down Valves as required from the
appropriate Continental Hydraulics Catalog.

For manifold dimensions and specifications, see the Daman Products LC Manifold Catalog.

#### Options

Code

Omit

HEA41R

Description No Cooler Option

Air-to-Oil Cooler HEA44 For Case Drain, SAE-8 (PVR6 Pump Only) Air-to-Oil Cooler

HEA41 For Return Line, SAE-12 Water-to-Oil Cooler HEA11 - Return Line 1/2 NPT Oil Port, 1 NPT Water Port

Code	Description	
Omit	No Options	
G1	Pressure Gauge	
Gi	0 - 1000 psi	
G1.5	Pressure Gauge	
G1.5	0 - 1500 psi	
G2	Pressure Gauge	
- 02	0 - 2000 psi	
G3	Pressure Gauge	
	0 - 3000 psi	
G5	Pressure Gauge	
	0 - 5000 psi	
N	Needle Valve SAE-4	
	Return Filter	
FRC10	10 GPM	
	10 Micron W/Indicator	
	Return Filter	
FRC40	40 GPM	
	10 Micron W/Indicator	
	External Pressure	
EP*	Adjustment	
	(Vane Pumps Only)	
	External Volume	
EV**	Adjustment	
	(Vane Pumps Only)	
	Check Valve Inline	
CV08	SAE-8, 5000 psi	
	(345 bar) Rated	
LT	Level/Temperature	
	Switch	
	Tank Heater	
TH	30°-100° F. (-1°-38° C.)	
	Adjustment	

\* If "EP" is Not Selected, Specify Pressure Setting.

\*\* Pump Requires Volume Control Code 6 (PVR6-\*B\*\*-RF-O-6)

#### **Typical Ordering Code**

WD-V6B20-050TWD-20VCS-V2-G3N-FRC10-EP-HEA44C (Power Unit) VSD03M-3A-GWDB-60L (Directional Control Valve - Qty. 2) BD03-100 (Bolt Kit - Qty. 2)

#### Reservoir

Code	Gallon Size	
5VCS	5	
10VCS	10	CARBON
20VCS	20	STEFI
30VCS	30	0.222
40VCS	40	
5VSS	5	304L
10VSS	10	STAINLESS
20VSS	20	STEEL WITH
30VSS	30	#4 FINISH
40VSS	40	

## Why settle for "close enough" when you need hydraulis?

Continental Hydrualics offers a complete line of products to meet your need for reliable, precise fluid power. In addition to the Wash Down Little Champ Power Units shown in this brochure, Continental also offers vane and piston pumps, a full line of control valves, and other hydrualic power units.

Continental's products are used in diverse applications such as plastic molding machinery, machinew tools, pulp and paper machines, marine auxiliary power controls and deck handling equipment, and masonry products produce equipment.

#### Distributors who know how to help ---

Anyone can say, "Here's our catalog, take your pick." Continental Distributors work with you to find out what you need. Then they work with our engineers to make sure you get it.

Service and support --- To provide maximum service and assistance, Continental Hydraulics maintains a strong distribution network, with representatives throughout North America and around the world. The avarage Continental Distributor has been with us for 15 years. Thay have repair and replacement parts, and the skill to solve your hydraulic problems.

Our Distributors work hand-in-hand with our Engineers to select components and build systems that will meet your toughest specifications. And they'll suggest creative solutions that can help save money or enhance performance.

Whether you need a complete hydraulic power supply or a single directional control valve, come to Continental.



#### HYDRAULICS.

#### **Continental Hydraulics**

4895 12th Avenue East Shakopee, MN 55379 U.S.A.

Phone: (952) 895-6400 Fax: (952) 895-6444

www.continentalhydraulics.com

Because Continental Hydraulics is continually improving its products, specifications and appearance are subject to change without notice.