




CONTINENTAL HYDRAULICS

# FO\*MSV-BV

NORMALLY CLOSED BLOCKING VALVE

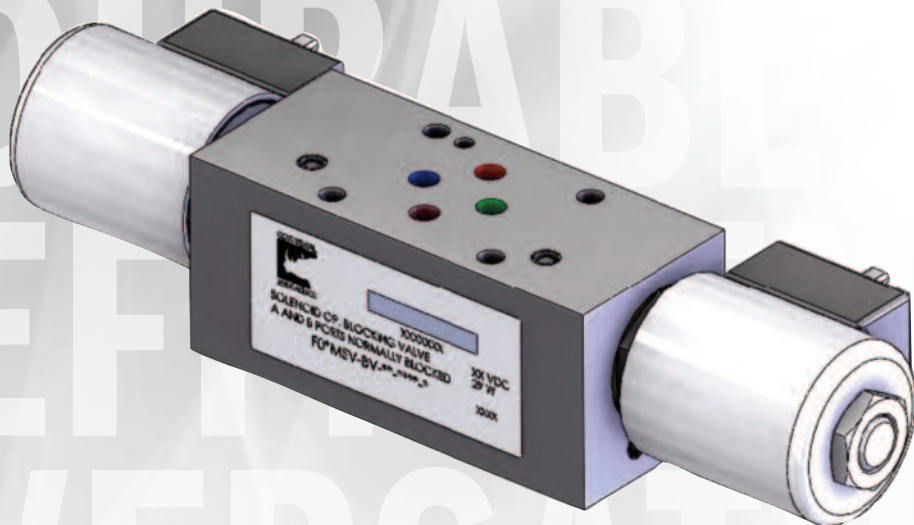


FO\*MSV-BV - NORMALLY CLOSED BLOCKING VALVE

# TOUGH

## FO\*MSV-BV

### NORMALLY CLOSED BLOCKING VALVE

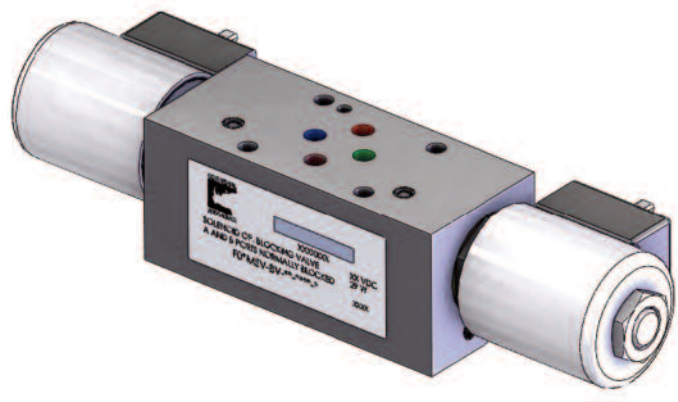

## DESCRIPTION

This modular stack valve is designed to help block oil movement both from the control valve or from the actuator. Typically used with Proportional valves with Zero-Lap type spool configurations that could allow oil movement when the system is shut down.

## OPERATIONS


This valve will block flow when de-energized and will allow bi-directional flow when energized.

Both the A and B work ports incorporate a 2-way, 2-position bi-directional, normally closed poppet type solenoid valve. Energizing the solenoid will allow full flow to the system.

## TYPICAL PERFORMANCE SPECIFICATIONS

	F03MSV		F05MSV	
	<b>MAXIMUM OPERATING PRESSURE</b>	5000 psi	350 bar	5000 psi
<b>MAXIMUM FLOW RATE</b>	20 gpm	76 l/min	30 gpm	114 l/min
<b>INTERNAL LEAKAGE at 5000 psi</b>	< 5 drops/min			
<b>MOUNTING SURFACE</b>	NFPA D03 ISO 4401-03-02-0-05		NFPA D05 ISO 4401-05-04-0-05	
<b>24 VOLT DC SOLENOID</b>	DIN 43650 connection, 1.21 A			
<b>WEIGHT</b>	lbs 3.4	kg 1.89	lbs 8.8	kg 4

## HYDRAULIC SCHEMATIC

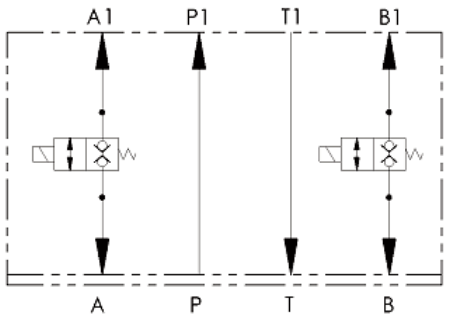

# IDENTIFICATION CODE

**F**    **MSV - BV - AD - 24DG -**    \_\_\_\_\_ DESIGN LETTER

SIZE	
<b>03</b>	NFPA D03
<b>05</b>	NFPA D05

CONTROL PORT Blocking poppet type	
<b>BV</b>	Port A & B

SEAL	
<b>A</b>	Buna


BODY MATERIAL	
<b>D</b>	Ductile iron

COIL TYPE	
<b>24DG</b>	24VDC DIN 43650 connection


TYPICAL ORDERING CODE:  
**F03MSV-BV-AD-24DG-C**  
**F05MSV-BV-AD-24DG-C**

## PRESSURE DROPS $\Delta P$ -Q (CARTRIDGE ONLY)

(OBTAINED WITH VISCOSITY OF 105 SUS - 21.8 CST AT 122°F - 50°C)

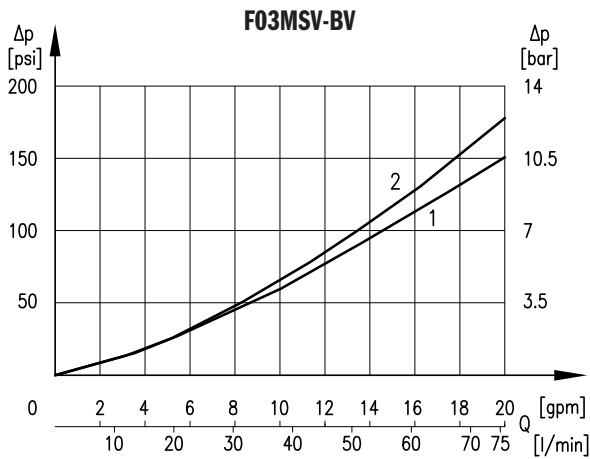

CURVE	FLOW PATH
1	port A1 to port A
2	port B1 to port B

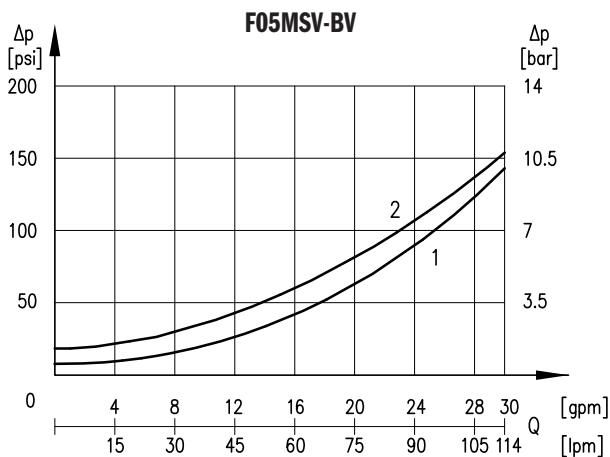


CURVE	FLOW PATH
1	port A1 to port A
2	port B1 to port B


# OVERALL AND MOUNTING DIMENSIONS

Dimensions in mm [IN]

## F03MSV

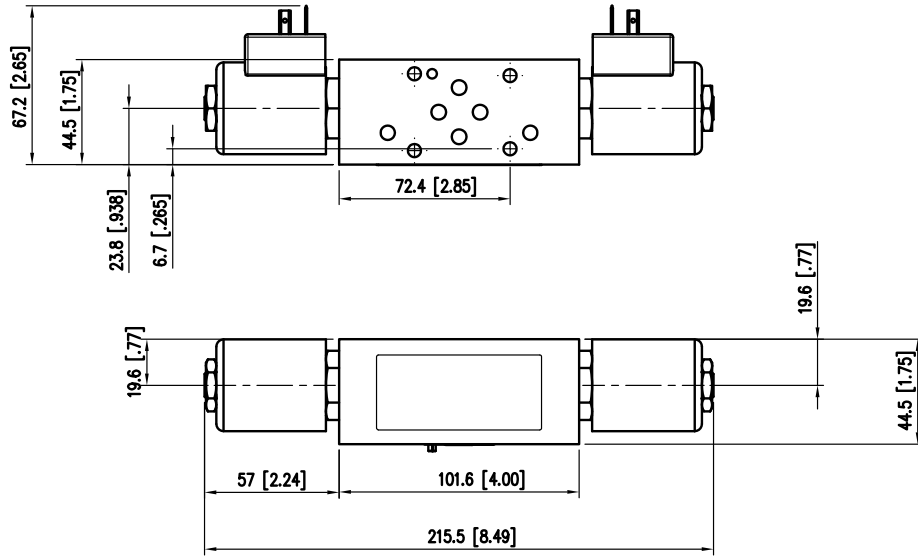

## F05MSV

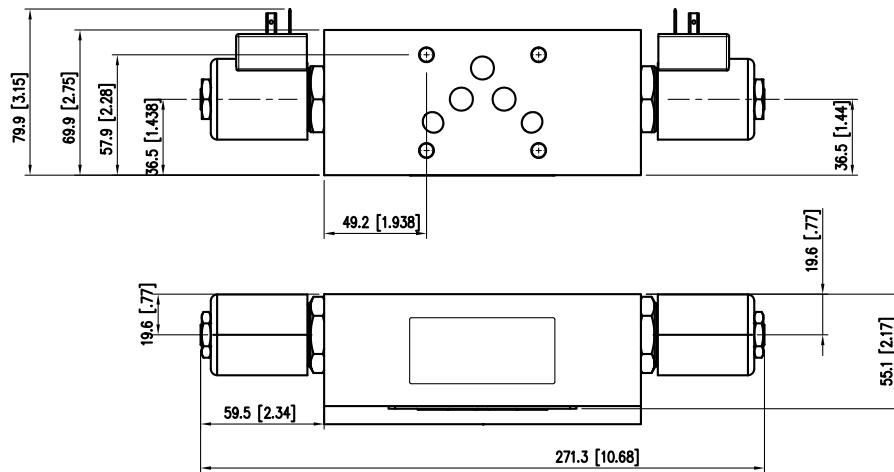

# APPLICATION DATA

## FLUIDS

All pressure drops shown on these data pages are based on 170 SUS fluid viscosity and 0.87 specific gravity. For any other specific gravity (G1) the pressure drop ( $\Delta P$ ) will be approx.  $\Delta P1 = \Delta P (G1/G)$ . See the chart for other viscosities.

<b>FLUID VISCOSITIES</b>	Cst	10	14.5	32	36	43	54	65	76	86	108	216	324	400
	SUS	60	75	150	170	200	250	300	350	400	500	1000	1500	1900
<b>MULTIPLIER</b>		0.77	0.81	0.97	1.00	1.04	1.10	1.15	1.20	1.24	1.31	1.56	1.72	1.83

Use mineral oil-based hydraulic fluids HL or HM type, according to ISO 6743-4. For these fluids, use NBR seals. For fluids HFDR type (phosphate esters) use FPM seals (code G). For the use of other kinds of fluid such as HFA, HFB, HFC, please consult our technical department.

Using fluids at temperatures higher than 180 degrees F causes the accelerated degradation of seals as well as the degradation of the fluids physical and chemical properties.

From a safety standpoint, temperatures above 130 degrees F are not recommended.

<b>RANGE TEMPERATURES</b>	Ambient	-4 to +130 °F	-20 to +54 °C
	Fluid	-4 to +180 °F	-20 to +82 °C
<b>FLUID VISCOSITY</b>	Range	60 -1900 SUS	10 - 400 cSt
	Recommended	120 SUS	25 cSt
<b>FLUID CONTAMINATION</b>	ISO 4406:1999 Class 18/16/13		

POWERFUL  
CURATE  
OVATIVE  
PRECISE  
URABLE  
EFFICIENT  
ERCATTLE

## ABOUT CONTINENTAL HYDRAULICS

Rugged, durable, high-performance, efficient—the reason Continental Hydraulics' products are used in some of the most challenging applications across the globe. With a commitment to quality customer support and innovative engineering, Continental's pumps, valves, power units, mobile and custom products deliver what the markets demand. Continental has been serving the food production, brick and block, wood products, automotive and machine tool industries since 1962. Learn how our products survive some of the most harsh environments.

**SALES@CONTHYD.COM**

4895 12TH AVENUE EAST • SHAKOPEE, MN 55379 / PH: 952.895.6400 / FAX: 952.895.6444 / [WWW.CONTINENTALHYDRAULICS.COM](http://WWW.CONTINENTALHYDRAULICS.COM)

CONTINENTAL



HYDRAULICS