

P05MSV-RP


PILOT OPERATED PRESSURE RELIEF VALVE




MODULAR VERSION
NFPA D05 ISO 4401-05

P max **5000 PSI 350 bar**
Q max **32 GPM 120 l/min**

MOUNTING INTERFACE

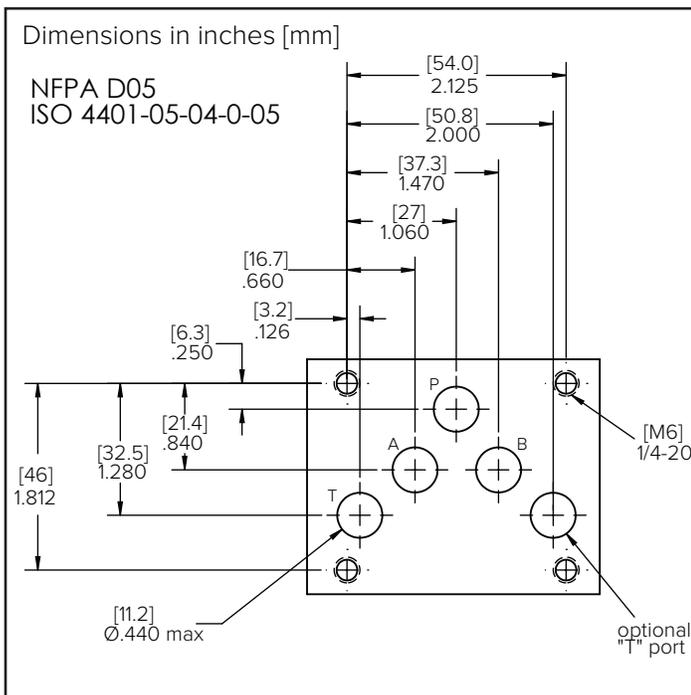

OPERATING PRINCIPLE

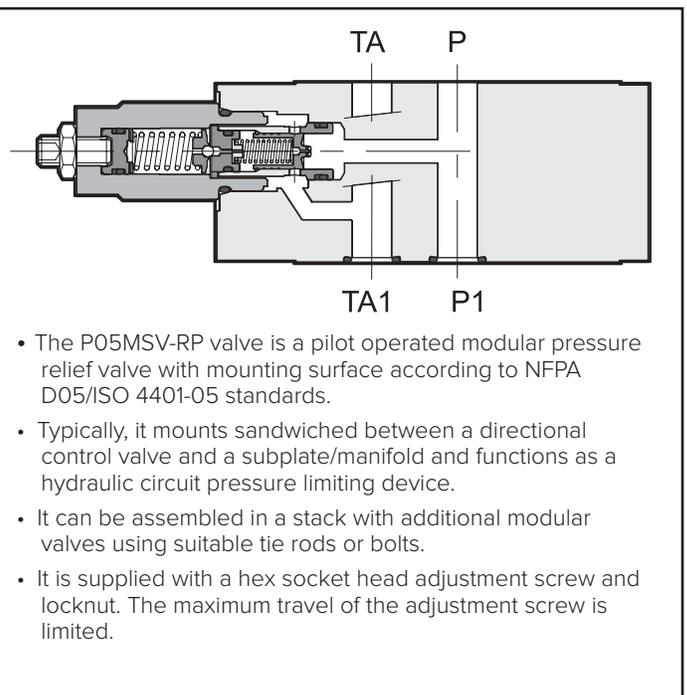


PERFORMANCES (measured with mineral oil of viscosity 36cSt at 120°F [50°C])


Maximum operating pressure	PSI [bar]	5000 [350]
Minimum controlled pressure	PSI [bar]	200 [14]
Maximum flow rate in controlled lines and in the free lines	GPM [l/min]	32 [120]
Ambient temperature range	°F [°C]	-4 to 140 [-20 to +60]
Fluid temperature range	°F [°C]	-4 to 176 [-20 to +80]
Fluid viscosity range	cSt	10 - 400
Fluid contamination degree	According to ISO 4406:1999 class 20/18/15	
Recommended viscosity	cSt	25
Mass: P05MSV-RP	lbs [kg]	6.2 [2,8]

HYDRAULIC SYMBOLS



P05MSV-RP

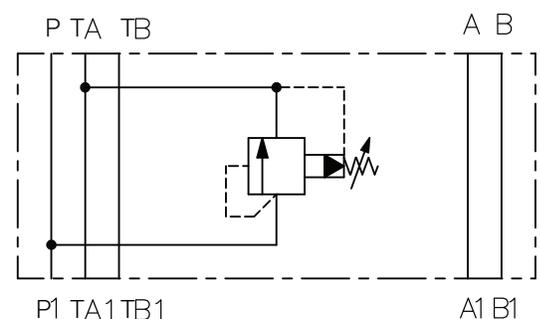

1 • IDENTIFICATION CODE

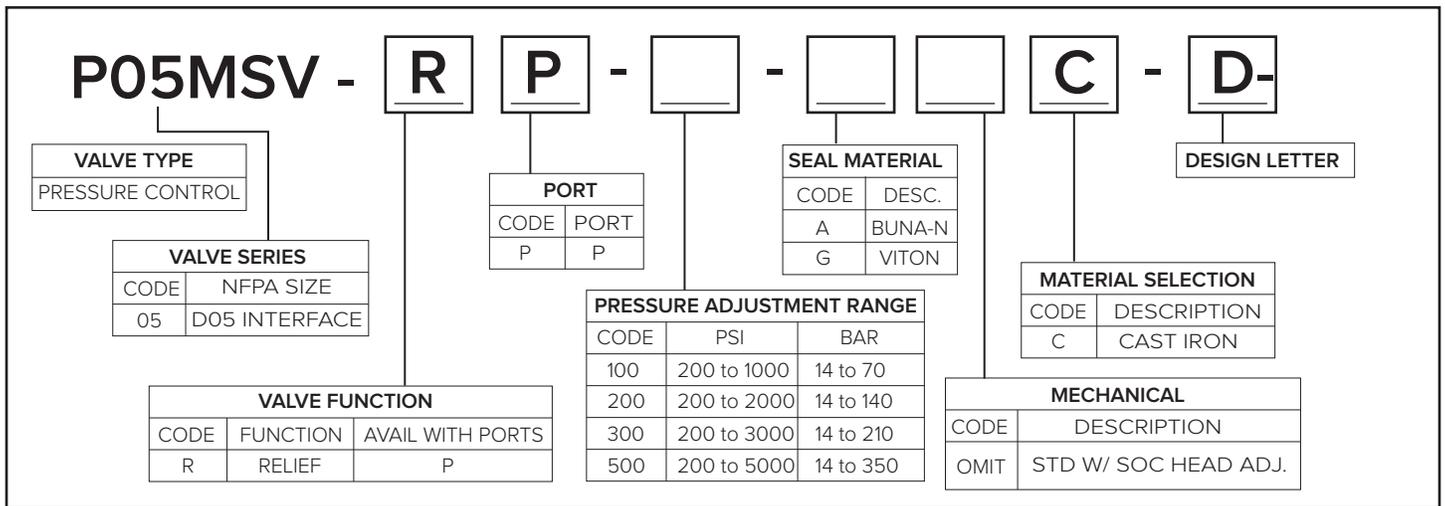

2 • CHARACTERISTIC CURVES (values obtained with viscosity of 36 cSt at 120°F [50°C])

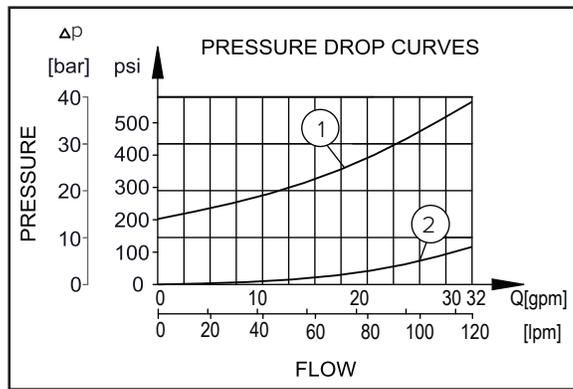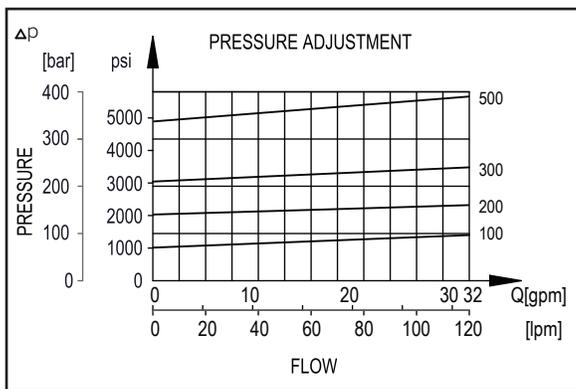

- 1) pressure drops on controlled lines
- 2) pressure drops on free lines

3 • HYDRAULIC FLUIDS

Use mineral oil-based hydraulic fluids HL or HM type, according to ISO 6743-4. For these fluids, use NBR seals (code A). For fluids HFDR type (phosphate esters) use FPM seals (code G). For the use of other kinds of fluid such as HFA, HFB, HFC, please consult our technical department. Using fluids at temperatures higher than 176°F [80°C] causes a faster degradation of the fluid and of the seals characteristics.

The fluid must be preserved in its physical and chemical characteristics.

4 • OVERALL AND MOUNTING DIMENSIONS

