

VSNG10

Solenoid Operated Directional Valve

**SUBPLATE MOUNTING
ISO 4401-05**

P max 4600 PSI 320 bar
Q max 33 GPM 125 l/min

► DESCRIPTION:

These valves are supplied with a ZINC-NICKEL PLATING making them the perfect choice for mobile and environmental applications that require better protection.


Direct acting, subplate mounted directional control valve, with mounting surface according to NFPA D05 ISO 4401-05. The valve body is made with high strength cast iron with internal passages designed to minimize pressure drop

OPERATIONS

Valve can be supplied for valve functions requiring 2 or 3 positions, as well as 3 or 4 way flow functions.

DIN 43650, DEUTSCH DT04-2P coil connections available.

Salt spray resistance up to 600h (test according to UNI EN ISO 9227 and UNI EN ISO 10289 tests and standards).

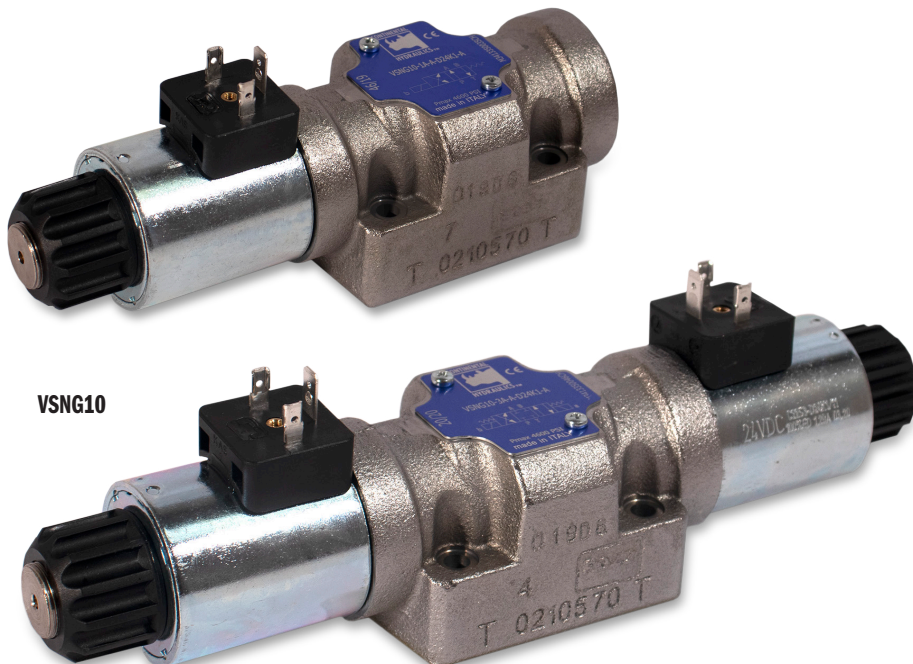

► PERFORMANCE:

| | | | |
|-----------------------------------|-----------------|------------------------------|--------------|
| Max Operating Pressure: | P - A - B Ports | 4600 psi | 320 bar |
| | T Ports | 3000 psi | 210 bar |
| Flowrate | | 33 gpm | 125 l/min |
| Mounting Surface | | NFPA D05 ISO 4401-05-04-0-05 | |
| Maximum Weight | Single Solenoid | 4.63 lbs | 2.1 kg |
| | Dual Solenoid | 5.95 lbs | 2.7 kg |
| Temperature Range | Ambient | -4 to +130°F | -20 to +54°F |
| | Fluid | -4 to +180°F | -20 to +82°F |
| Fluid Viscosity | Range | 60-1900 SUS | 10-400 cSt |
| | Recommended | 120 SUS | 25 cSt |
| Fluid Contamination Degree | | ISO 4406:1999 Class 20/18/15 | |

(Obtained with mineral oil with viscosity of 36 cSt at 50°C and electronic control card)

► IDENTIFICATION CODE:

VSNG10 -  -    -  -  ———— DESIGN LETTER

| |
|--|
| BASIC VALVE FUNCTIONS / SPOOL CODES |
| see page 3 |

| SEAL TYPE | |
|-----------|-------------|
| CODE | DESCRIPTION |
| A | BUNA |
| G | VITON |

| MECHANICAL (SELECT 1) | |
|-----------------------|---------------------------------|
| CODE | DESCRIPTION |
| OMIT | No options |
| R | Single Solenoid - B port end |

(See page 5 for more details)

| OVERRIDE OPTIONS (SELECT 1) | |
|-----------------------------|--------------------------------|
| CODE | DESCRIPTION |
| OMIT | No options |
| U | Manual Override Boot |
| CP | Push Knob (DC only) |
| CK1 | Turn Knob (DC only) |
| CPK | Mechanical Detent (DC only) |

For applications requiring a higher IP rating, one of the above codes will be required. (See page 8 for more details)

| VOLTAGE / CONNECTION | | |
|----------------------|-------------|--|
| CODE | DESCRIPTION | CONNECTION TYPE |
| DC Voltages | | |
| D12WK1 | 12 VDC | DIN 43650 (Form A) Zinc-Nickel coating |
| D12WK7 | 12 VDC | Deutsch DT04-2P Zinc-Nickel coating |
| D12WK7D | 12 VDC | Deutsch DT04-2P Bi-Directional Diode Zinc-Nickel coating |
| D14K1 | 14 VDC | DIN 43650 (Form A) |
| D24WK1 | 24 VDC | DIN 43650 (Form A) Zinc-Nickel coating |
| D24WK7 | 24 VDC | Deutsch DT04-2P Zinc-Nickel coating |
| D24WK7D | 24 VDC | Deutsch DT04-2P Bi-Directional Diode Zinc-Nickel coating |
| D28K1 | 28 VDC | DIN 43650 (Form A) |
| D48K1 | 48 VDC | DIN 43650 (Form A) |
| D110K1 | 110 VDC | DIN 43650 (Form A) |
| D125K1 | 125 VDC | DIN 43650 (Form A) |
| D220K1 | 220 VDC | DIN 43650 (Form A) |


TYPICAL ORDERING CODE:
VSNG10-3A-G-D24WK1-B

Please see Connectors Catalog
Form #1027453


► FUNCTIONS/SPOOL CODES:

2 solenoids


3 positions with spring centering




1 solenoid side A
2 positions (central + external)
with spring centering




1 solenoid side B
2 positions (central + external)
with spring centering




1 solenoid side A
2 external positions with
return spring




1 solenoid side B
2 external positions with
return spring



1 solenoid side A
2 positions with return spring




1 solenoid side B
2 positions with return spring



Besides the diagrams shown, which are the most frequently used, other special versions are available: consult our technical department for their identification, feasibility and operating limits.

2 solenoids

2 positions with mechanical retention



SWITCHING TIMES


Switching times obtained with 3A solenoid valve. The energizing time is obtained at the time the spool switches over. The de-energizing time is measured at the time the pressure variation occurs on the line.

| TIMES (± 10%) [MS] | |
|--------------------|---------------|
| ENERGIZING | DE-ENERGIZING |
| 70 - 100 | 15 - 20 |


► PERFORMANCE DATA:

PRESSURE DROPS Δp -Q

(obtained with viscosity 170 SUS - 26 cSt at 122°F - 50°C)

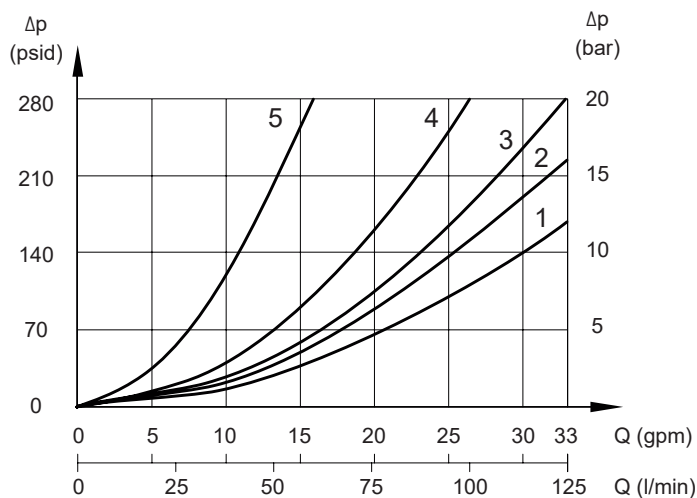


| SPOOL TYPE | FLOW DIRECTION | | | | | |
|------------|----------------|-------|-------|-------|--------|----------------|
| | SHIFTED | | | | CENTER | |
| | P → A | P → B | A → T | B → T | P → T | A → T B → T |
| 3A, 5A | 1 | 1 | 2 | 2 | | |
| 3B, 5B | 1 | 1 | 1 | 1 | 1 | 5 |
| 3F, 5F | 1 | 1 | 1 | 1 | | |
| 3L, 5L | 4 | 4 | 4 | 4 | 1 | |
| 2A | 2 | 2 | 2 | 2 | | |
| 1A | 2 | 2 | 3 | 3 | | |
| 1B | 2 | 2 | 1 | 1 | | |
| 9X | 3 | 3 | | | | |

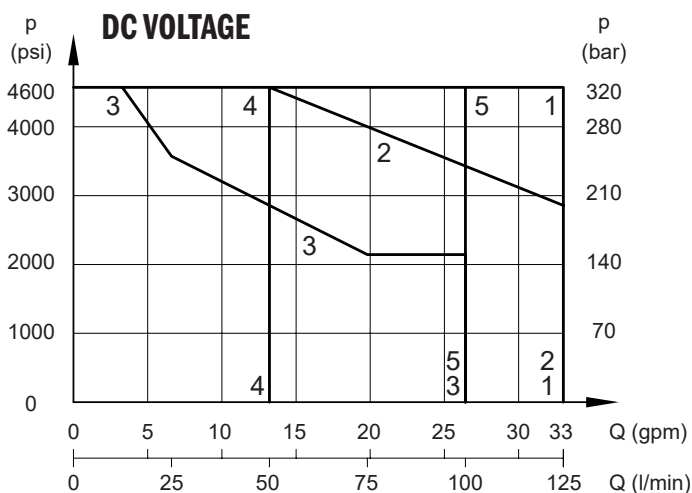

| CURVE | SPOOL |
|-------|------------|
| 1 | 3A, 3B, 2A |
| 2 | 1B |
| 3 | 3F |
| 4 | 3L |
| 5 | 1A, 9X |

NOTES:

- The values indicated in the graphs are relevant to the standard solenoid valve, with D24 coils.
- Valve performance was tested in a four way circuit (full loop). Performances may be reduced from that shown when used in a three-way circuit (half circuit), i.e. A or B port plugged.
- The values have been obtained according to ISO 6403 norm with solenoids at rated temperature and supplied with voltage equal to 90% of the nominal voltage. The values have been obtained with filtration according to ISO 4406:1999 class 18/16/13.

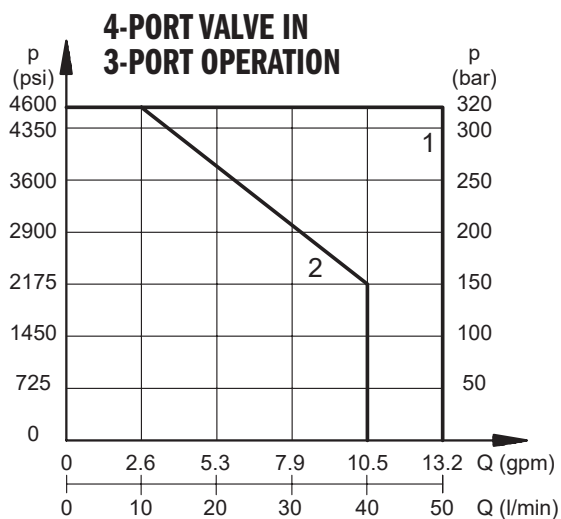

Operating limits of a 4-port valve in 3-port operation or with port A or B plugged or without flow.


| SPOOL | CURVE |
|-------|-------|
| 1A | 1 |
| 1B | 2 |

► **INSTALLATION DATA:**


Dimensions mm [in]

OVERALL AND MOUNTING DIMENSIONS - DIN STYLE VERSION

VSNG10-2*, 3*

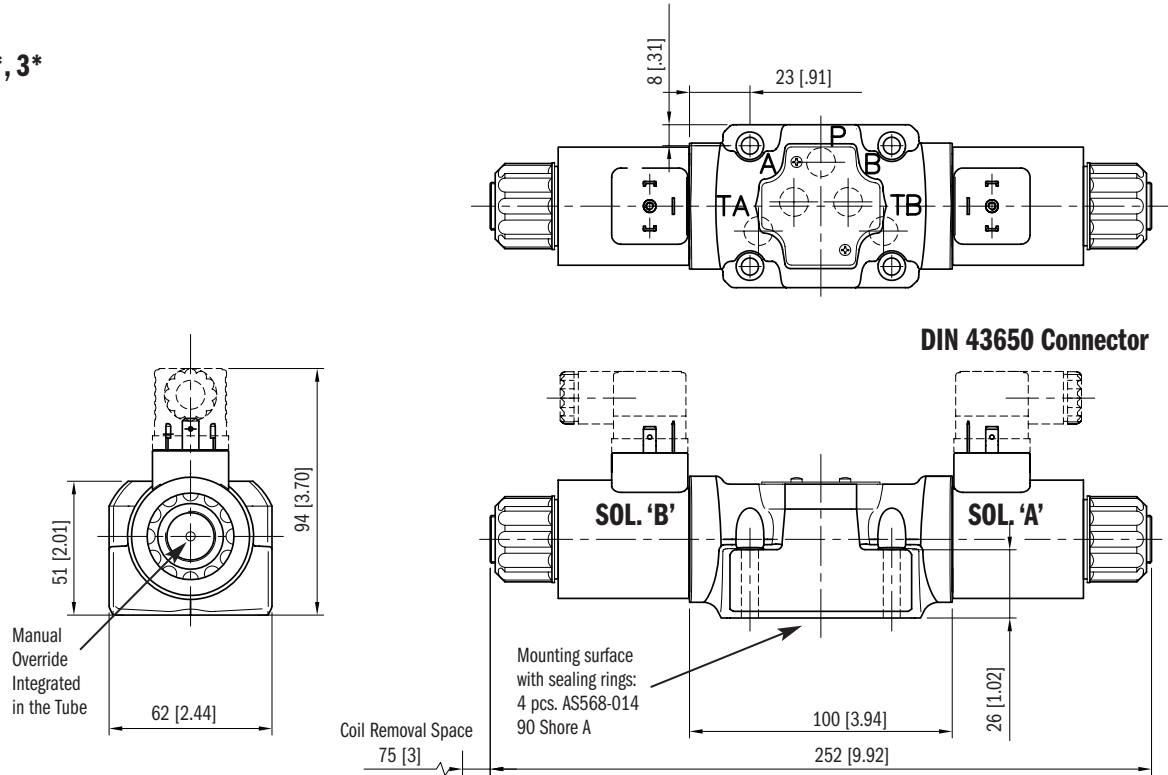

VSNG10-1*, 5*, 9X

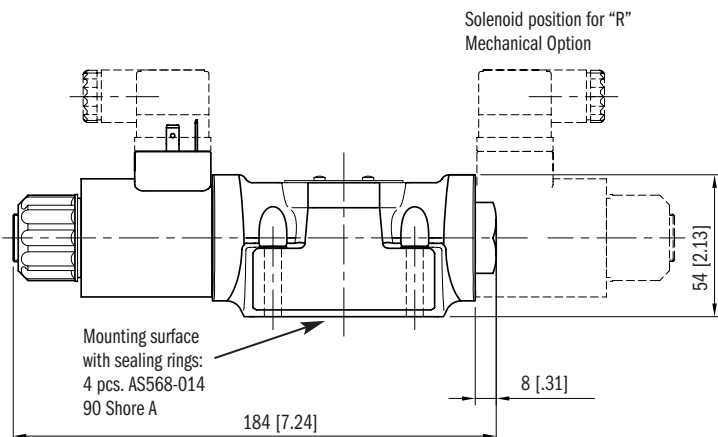



► ELECTRICAL:

CONNECTIONS



See Connectors and Cable Sets Catalog (1027453) for all available connection styles.

Dimensions mm [in]

Connection for EN 175301-803
(ex DIN 43650) connector
code WK1 (DC voltage version only)

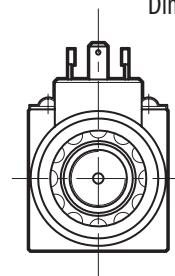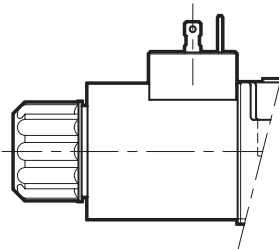

Connection for
DEUTSCH DT06-2S male connector
code WK7
code WK7D (with diode)

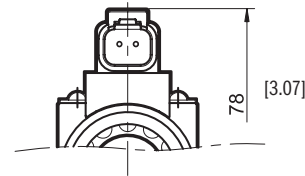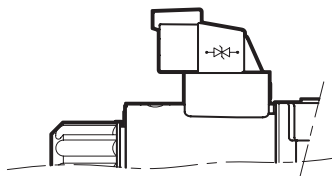

Solenoids

These are essentially made up of two parts: tube and coil. The tube is threaded into the valve body and includes the armature that moves immersed in oil, without wear. The inner part, in contact with the oil in the return line, ensures heat dissipation. The coil is fastened to the tube by a threaded ring, and can be rotated 360°, to suit the available space.

NOTE: In order to further reduce the emissions, with DC supply, use of type H connectors is recommended. These prevent voltage peaks on opening of the coil supply electrical circuit.

| | |
|---|-------------------------------|
| SUPPLY VOLTAGE FLUCTUATION | ± 10% Vnom |
| MAX SWITCH ON FREQUENCY | 18.000 ins/hr |
| DUTY CYCLE | 100% |
| ELECTROMAGNETIC COMPATIBILITY (EMC) (NOTE) | In compliance with 2014/30/EU |
| LOW VOLTAGE | In compliance with 2014/35/EU |
| CLASS OF PROTECTION: Coil insulation (VDE 0580) Impregnation: DC valve | class H class F |

► ELECTRICAL:

Protection from atmospheric agents IEC 60529

The IP protection degree is guaranteed only with both valve and connectors of an equivalent IP degree, correctly connected and installed.

| Electric Connection Code | Electric Connection Protection | Whole Valve Protection |
|--------------------------|--------------------------------|--------------------------|
| K1 | IP65 | IP65 |
| WK1 | IP66 | IP66 |
| WK7 | IP66/IP68/IP69 IP69K* | IP66/IP68/IP69 IP69K* |
| WK7D | IP66/IP68/IP69 IP69K* | IP66/IP68/IP69 IP69K* |

(*) The IP69K protection degree is not taken in account in IEC 60529 but is included in ISO 20653.

Current and absorbed power for DC solenoid valves

The coils WK feature a zinc-nickel surface treatment.

The WK7D coil includes a bi-directional diode for protection from voltage peaks during switching. During the switching the diode significantly reduces the energy released by the winding, but limiting the voltage to 31.4 V in the D12 coil and to 58.9 V in the D24 coil.

Using connectors type "D" (VEA-6FR) with embedded bridge rectifier it is possible to feed DC coils (starting from 48V voltage) with alternating current (50 or 60 Hz), considering a reduction of the operating limits (see page 6).


| Code | Nominal Voltage [V] | Resistance at 20 °C [Ω] | Current Consumption [A] | Power Consumption [W] | Replacement Coil Code |
|----------------|---------------------|-------------------------|-------------------------|-----------------------|-----------------------|
| D12WK1 | 12 | 4.4 | 2.72 | 32.7 | M3984000001 |
| D12WK7 | 12 | 4.4 | 2.72 | 32.7 | M3984000101 |
| D12WK7D | 12 | 4.4 | 2.72 | 32.7 | M3984000111 |
| D14K1 | 14 | 7.2 | 1.93 | 27 | M1903086 |
| D24WK1 | 24 | 18.6 | 1.29 | 31 | M3984000002 |
| D24WK7 | 24 | 18.6 | 1.29 | 31 | M3984000102 |
| D24WK7D | 24 | 18.6 | 1.29 | 31 | M3984000112 |
| D28K1 | 28 | 26 | 1.11 | 31 | M1903082 |
| D48K1 | 48 | 78.6 | 0.61 | 29.5 | M1903083 |
| D110K1 | 110 | 423 | 0.26 | 28.2 | M1903464 |
| D125K1 | 125 | 550 | 0.23 | 28.6 | M1903467 |
| D220K1 | 220 | 1692 | 0.13 | 28.2 | M1903465 |

► **MANUAL OVERRIDES:**

Dimensions mm [in]


U Manual override, boot protected

Code: M3401150006

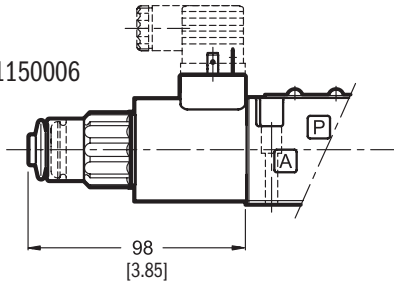


CP Push manual override

Code: M3401150005

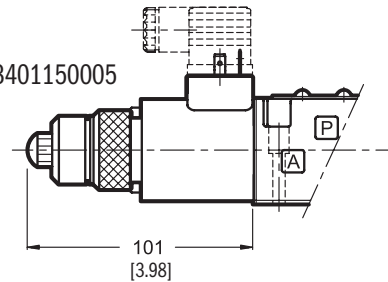


CPK Push manual override with mechanical retention

Code: M3401150004

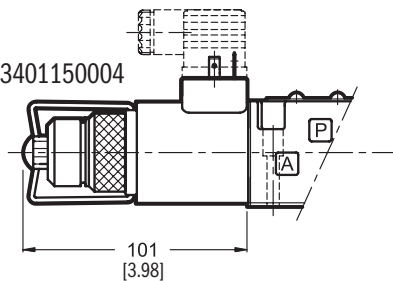

CK1 Turning knob override

Code: M3401150031

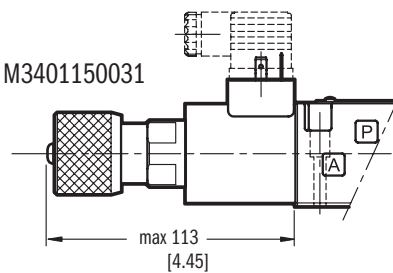

► **INSTALLATION DATA:**

SEAL KIT

| | |
|-----------------------|---------|
| BUNA SEAL KIT | 1019658 |
| Viton Seal Kit | 1030381 |

BOLT KIT

| | |
|-------------------|---------|
| BD05-150-B | 1019657 |
|-------------------|---------|

NOTES:

1. Bolt kit consists of: Qty. 4 1/4 - 20 UNC x 1.5 inch / Qty. 4 #1/4 Lock washer
2. The recommended torque value for fasteners is: 6 lbf (8 Nm)